

VERIFICATION OF TRANSLATION

I, (name and address of translator) HIROYUKI NAKAGAWA,

5-21, Toranomom 2-chome, Minato-ku, Tokyo, Japan

am the translator of Japanese Patent Application number 2003-116768 and I state that
the following is a true translation to the best of my knowledge and belief.

(Signature) 

(Date) December 12, 2006

[Name of Document] Application for Patent

[Docket No.] 253464

[Date of Submission] April 22, 2003

[Addressee] Commissioner, Patent Office

[International Patent Classification] G03G 15/00 534

[Title of the Invention] Sheet processing apparatus and
image forming apparatus

[Number of Claims] 5

[Inventor]

 [Address] c/o Canon Kabushiki Kaisha, 30-2,
Shimomaruko 3-chome, Ohta-ku, Tokyo

 [Name] Daiju Yoshino

[Applicant for Patent]

 [Identification No.] 000001007

 [Name] Canon Kabushiki Kaisha

[Agent]

 [Identification No.] 100066784

 [Patent Attorney]

 [Name] Shyukichi Nakagawa

 [Telephone No.] 03-3505-0788

[Agent Appointed]

 [Identification No.] 100095315

 [Patent Attorney]

 [Name] Hiroyuki Nakagawa

 [Telephone No.] 03-3505-0788

[Agent Appointed]

 [Identification No.] 100120400

[Patent Attorney]

[Name] Koshuke Hida

[Telephone No.] 03-3505-0788

[Identification of Fee]

[Deposit Account No.] 011718

[Amount of Payment] 21,000 Yen

[List of Submitted Articles]

[Name of Article] Specification 1

[Name of Article] Drawings 1

[Name of Article] Written Abstract 1

[General Power of Attorney No.] 0212862

[Necessity for proof] Necessary

SHEET PROCESSING APPARATUS AND IMAGE FORMING APPARATUS

[Name of Document] Specification

[Title of the Invention] Sheet processing apparatus and image forming apparatus

[Scope of Claims for patent]

[Claim 1] A sheet processing apparatus aligning and stacking a sheet comprising:

a stacking means for stacking the sheet or a sheet bundle; a conveying means for conveying the sheet or sheet bundle toward the stacking means;

a sheet rear end aligning means for aligning rear end of the sheet or sheet bundle upon pressing toward the stacking means the rear end of the sheet or sheet bundle conveyed by the conveying means; and

a controlling means for controlling operation of the sheet rear end aligning means,

wherein the controlling means controls the operation of the sheet rear end aligning means so that acceleration α of the sheet or sheet bundle S by pressing of the sheet rear end aligning means satisfies a relation: $\alpha \leq -\mu_1'g$ and $\alpha \leq -\mu_2'g$ where acceleration of the sheet or sheet bundle by pressing of the sheet rear end aligning means at a time that the sheet rear end aligning means presses the rear end of the sheet or sheet bundle to align the rear end, is denoted as α , where gravity

acceleration is denoted as g , where kinematical frictional coefficient of the stacking means is denoted as μ_1' , and where kinematical frictional coefficient of the sheet or sheet bundle already stacked on the stacking means is denoted as μ_2' .

[Claim 2] The sheet processing apparatus according to claim 1, further comprising a processing means capable of temporarily stacking sheets in a plural number on an upstream side of the stacking means and the conveying means in the sheet conveyance direction for processing the sheet or sheet bundle, wherein the sheet or sheet bundle processed at the processing means is conveyed to the stacking means by the conveying means.

[Claim 3] The sheet processing apparatus according to claim 2, wherein the processing means includes a processing tray capable of temporarily stacking sheets in a plural number, an aligning means for aligning the sheets stacked on the processing tray, and a stapling means for stapling the sheet bundle aligned by the aligning means.

[Claim 4] The sheet processing apparatus according to claim 1, wherein the stacking means has a stacking surface extending substantially horizontally for stacking the sheet or sheet bundle.

[Claim 5] An image forming apparatus comprising:

an image forming apparatus body for forming an image on a sheet; and

a sheet processing apparatus for aligning and stacking the sheet delivered from the image forming apparatus body,

wherein the sheet processing apparatus is as set forth

in any one of claims 1 to 4.

[Detailed Description]

[0001]

[Technical Field of the Invention]

This invention relates to a sheet processing apparatus aligning and stacking sheets and an image forming apparatus having this sheet processing apparatus.

[0002]

[Background Art]

In image forming apparatuses such as photocopiers and printers, conventionally, sheets S on which images are formed with an image forming apparatus body 300 as shown in Fig. 6 are temporarily stacked in a processing tray 140 in a sheet processing apparatus 100, and the sheets S are then subject to a sheet post-processing such as alignment and stapling of the sheets. The sheets S on which the sheet post-processing is made are delivered in a bundled manner onto a stacking tray 400 having an inclined stacking surface by bundle delivering means 108; the delivered sheet bundle S is moved by the self-weight over the inclined stacking surface of the stacking tray 400; the rear ends of the sheet bundle is aligned at a rear end aligning wall. The stacking sheet number on the stacking tray 400 is depending on an up and down movable stroke of the stacking tray 400.

[0003]

[Reference 1]

Patent laying open 2000-219416

[0004]

[Problem to be solved by the Invention]

However, as shown in Fig. 6, with the stacking tray 400 having the conventional inclined stacking surface, where sheets not so rigid or sheets having a strong downward curling in which the sheet end is bent toward the stacking surface side, are stacked, folding may occur due to the self-weight caused by the steep slope, so that there raises a problem that alignment of stacking sheets may be reduced.

[0005]

When the sheets S on which the stapling processing is made are stacked on the stacking tray 400 as shown in Fig. 7, a staple H1 of the sheet bundle S1 already stacked on the stacking tray 400 may engage with a rear end of a sheet bundle S2 delivered in a bundled manner, and therefore, the rear end of the sheet bundle S2 may not slide down to the rear end alignment wall 70, so that the stacked sheet bundles S1, S2 are positionally shifted in the conveyance direction, thereby raising a problem on stacking alignment property.

[0006]

It is an object of the invention to provide an apparatus preventing stacked sheet bundles from positionally shifting in the conveyance direction and improving stacking alignment property of the sheet bundles.

[0007]

[Means for Solving the Problem]

Representing construction of the present invention is an image forming apparatus forming an image on a sheet, comprising: an image forming section for forming an image on the sheet; a

stacking means for stacking the sheet or sheet bundle on which the image is formed by the image forming section; a conveying means for conveying the sheet or sheet bundle toward the stacking means; a sheet rear end aligning means for aligning rear end of the sheet or sheet bundle upon pressing toward the stacking means the rear end of the sheet or sheet bundle conveyed by the conveying means; and a controlling means for controlling operation of the sheet rear end aligning means, wherein the controlling means controls the operation of the sheet rear end aligning means so that acceleration α of the sheet or sheet bundle S by pressing of the sheet rear end aligning means satisfies a relation: $\alpha \leq -\mu_1'g$ and $\alpha \leq -\mu_2'g$ where acceleration of the sheet or sheet bundle by pressing of the sheet rear end aligning means at a time that the sheet rear end aligning means presses the rear end of the sheet or sheet bundle to align the rear end, is denoted as α , where gravity acceleration is denoted as g , where kinematical frictional coefficient of the stacking means is denoted as μ_1' , and where kinematical frictional coefficient of the sheet or sheet bundle already stacked on the stacking means is denoted as μ_2' .

[0008]

For the above construction, by controlling acceleration of the sheet or the sheet bundle pushed by sheet rear end aligning means according to the condition above, slant of conveyance direction of the sheet at the front end or rear end can be avoided and it can improve stacking accuracy of the sheet bundle on the sheet stacking means.

[0009]

[Best mode for carrying out the Invention]

Referring to the drawings, hereinafter, the preferred embodiments of the invention are described in detail in an exemplifying manner. The sizes, materials, and shapes of structural parts set forth in the following description, correlative positions of those, and the like can be modified properly according to the structure and the various conditions of the apparatus to which this invention applies, and are not intended to render the scope of the invention limited to those only.

[0010]

[The first embodiment]

The embodiment of the sheet processing apparatus and the image forming apparatus having the sheet processing apparatus according to the invention are exemplified as follows.

[0012]

The embodiment of the image forming apparatus having the sheet processing apparatus according to the invention are exemplified in Fig. 1 and Fig. 2. Fig. 1 is a cross section showing an image forming apparatus 30 mounting a sheet processing apparatus 1 according to an embodiment of the invention; Fig. 2 is a cross section showing the sheet processing apparatus 1.

[0013]

In this embodiment, the sheet processing apparatus 1 as shown in Fig. 1 is exemplified as the sheet processing apparatus.

The sheet processing apparatus 1 is disposed at an upper portion of the image forming apparatus body 30 and at a lower portion of an original document reading apparatus 35. With this sheet processing apparatus 1, the sheets S, on which images are formed, delivered out of the image forming apparatus body 30 are stacked temporarily on a sheet tray 40, and subject to a post-processing such as stapling and alignment. After the post-processing is made, the sheets (or sheet bundle) S after done with the post-processing are aligned at and stacked on a stacking tray 4 arranged as extending substantially horizontally.

[0013]

This invention, however, is not limited to the example shown in Fig. 1. That is, the sheet processing apparatus is not limited to the apparatus in which the sheets S delivered out of the image forming apparatus body 30, on which images are formed, are aligned at and stacked on the stacking tray 4. For example, this invention is effective for an apparatus in which the sheet processing apparatus is directly connected to an image forming apparatus body 30 not through a processing means having a processing tray 40 or the like, or an apparatus in which the sheet processing apparatus is attached to the exterior of the image forming apparatus body 30.

[0014]

[Brief Structure of the Image Forming Apparatus]

In Fig.1, numeral 1 is a sheet processing apparatus mounted on the image forming apparatus body 30 according to this embodiment; an automatic original document reading apparatus

35 is mounted at an upper portion of the image forming apparatus body 30. The sheet processing apparatus 1 can be not with any processing means constituted of the processing tray 40 or the like. The image forming apparatus body 30 is equipped with an image forming section constituted of such as a photosensitive drum 3, a developing device 5, a transfer belt 11.

[0015]

In the image forming apparatus body 30, the original document by the automatic original document reading apparatus 35 is fed automatically to the reading position as shown in Fig. 1, and images are read at an image reading section 36. Based on this image information, images are formed on the sheet with image forming section as described below. First, a signal is sent to a laser scanner unit 2 based on image information read with a controller, not shown, and laser beam is emitted according to the image information.

[0016]

Subsequently, the laser beam reflects at a rotating polygon mirror, and is returned at a reflection mirror to be radiated onto a photosensitive drum 3 whose surface is uniformly charged, thereby forming electrostatic latent images. The electrostatic latent image on the photosensitive drum 3 is developed with a developing device 5, and is then transferred onto a sheet S such as paper or OHP sheet as a toner image.

[0017]

The sheet S is properly selectively fed out of sheet cassettes 31, 32, 33, 34 with a pickup roller 38 constituting

the sheet feeding means. The sheet S is conveyed one by one upon separation by a separating means 37, and after corrected with a pre-registration roller pair when fed obliquely, the sheet is fed to a transfer position in synchrony with the rotation of the photosensitive drum 3, so that the toner image formed on the photosensitive drum 3 is transferred to the sheet S via a transfer belt 11 as an intermediate transfer body.

[0018]

Then, the sheet S is introduced to a fixing roller pair 6, and the toner image transferred to the sheet S is permanently fixed upon application of heat and pressure from the fixing roller pair 6. A fixing upper separation nail and a fixing lower separation nail are in contact with the fixing roller pair 6, and this separates the sheet S from the fixing roller pair 6.

[0019]

The sheet S on which images are formed thus with the image forming section is further conveyed to the exterior of the image forming apparatus body 30 with a body side delivery roller pair 7, so that the sheet S is introduced into the sheet processing apparatus 1 coupled to the image forming apparatus body 30.

[0020]

[Brief Structure of the Sheet Processing Apparatus]

In Fig. 1, the sheet processing apparatus 1 includes the stacking tray 4 as a stacking means for stacking the sheets or sheet bundles, a rocking roller 50 serving as a conveying means for conveying sheets or sheet bundles toward the stacking tray 4, a sheet rear end aligning means made of such as a rear end

alignment wall 70 for aligning the rear ends of sheets or sheet bundles in pressing toward the stacking tray 40 the rear ends of sheets or sheet bundles conveyed by the rocking roller 50, and a finisher CPU 79 as controlling means for controlling the operation of the sheet rear end aligning means.

[0021]

A processing means capable of temporarily stacking a plural number of sheets and processing the sheets or sheet bundles is provided on an upstream side in the sheet conveyance direction of the stacking tray 4 and the rocking roller 50. The processing means according to this embodiment includes a processing tray 40 temporarily stacking a plural number of sheets, an aligning means constituted of alignment plates 41, 42 for aligning sheets stacked on the processing tray 40, and a stapler unit 10 serving as stapling means for stapling processing of sheet bundles aligned with the aligning means. The processing means can have only the aligning means, or may have, other than the aligning means, a punching means for making holes in the sheets, a pasting means for pasting an end of the sheet bundle, and a bookmaking means such as a tape attaching means attaching a binding tape to the end of the sheet bundle.

[0022]

As shown in Fig. 2, the sheet S delivered out of the delivery roller pair 7 on the body side of the image forming apparatus body 30 is delivered toward the stacking tray 4 from a delivery section 8 made of a delivery roller 8a on a side of the sheet processing apparatus 1 and a delivery roller 8b driven

by the roller 8a. The rear end of the sheet S is dropped down by the rocking roller 50 at a timing that the rear end of the sheet S passes through the delivery section 8, and the sheet S is clamped by the rocking roller 50 and a driven roller 71.

[0023]

The rear end of the sheet S is subsequently fed along a lower guide 61 to the processing tray 40 in the opposite direction to the conveyance direction as conveyed so far by the reverse rotation of the rocking roller 50, and sheets are aligned one by one in the sheet conveyance direction and in the sheet width direction substantially perpendicular to the sheet conveyance direction by the aligning means constituted of such as a returning belt 60 and the alignment plates 41, 42 as described below.

[0024]

The alignment in the conveyance direction of the sheet S is done by contacting the rear end of the sheet S to a rear end stopper 62 of the sheet S serving as a sheet reception means located at an end of the processing tray 40 for receiving the sheet S on the processing tray 40, from the self-weight force of the sheet S obtained by the inclined angle of the processing tray 40 and from the returning belt 60. The alignment in the sheet width direction 40 is done by the alignment plates 41, 42 arranged on both sides in the sheet width direction operating by a driving means, not shown, e.g., lack and pinion gear drive source, and by the controlling means.

[0025]

Where the stapling mode is selected, the stapler unit 10 makes stapling to the already aligned sheet bundles S which are aligned on the processing tray 40. The sheet bundles S thus finished with the post-processing are delivered and stacked on the stacking tray 4 arranged to extend substantially horizontally by rotation in the counterclockwise direction in Fig. 2 of the rocking roller 50.

[0026]

[Alignment of Sheet Rear Ends]

Referring to Figs 3 to 5, sheet rear end alignment operation in the sheet processing apparatus 1 is described next in detail. Fig. 3 is a cross section showing delivery operation of the sheet bundles according to the embodiment of the invention; Fig. 4 is a cross section showing alignment operation of the rear ends of a sheet bundle; Fig. 5 is a block diagram showing a control system of the sheet processing apparatus according to the embodiment of the invention.

[0027]

First, described in reference with Figs. 3, 4 are means for delivering, aligning, and stacking the already-processed sheet bundle S on the processing tray 40 onto the stacking tray 4. As shown in Fig. 4, the rear end alignment wall 70 constituting the sheet rear end aligning means delivers the sheet bundles S from the processing tray 40 to the stacking tray 4, and serves as an alignment wall for aligning the rear ends of the sheet bundles S when stacking the sheet bundles S. The rear end alignment wall 70 is urged by a spring 12 and

positionally regulated to an alignment reference position (see, Fig. 2) upon contacting to a cam 72 located at the home position.

[0028]

As shown in Fig. 5, a drive signal is transmitted from the finisher CPU 79 as the controlling means of the sheet processing apparatus 1 to a rear end alignment wall drive motor 76 via a rear end alignment wall drive motor driver 86, and the rear end alignment wall 70 is pivotally moved in the sheet conveyance direction by a cam 72 as a center upon rotation of the rear end alignment wall drive motor 76.

[0029]

In Fig. 5, numeral 80 is a delivery motor and rotationally drives the delivery roller 8a upon transmitting the drive signal from the finisher CPU 79 via a delivery motor driver 81 to the delivery motor 80. Numeral 82 is a rocking arm drive motor, to which the drive signal from the finisher CPU 79 via a delivery motor driver 83 is transmitted, thereby driving a rocking arm 54 rocking a support arm 51 rotatably supporting the rocking roller 50. Numeral 84 is a rocking roller drive motor, to which the drive signal from the finisher CPU 79 via a delivery motor driver 85 is transmitted, thereby rotatably driving the rocking roller 50. Numeral 87 is a main CPU as a controlling means provided on a side of the image forming apparatus.

[0030]

As shown in Fig. 3, the sheet bundle S stacked on the processing tray 40 (Fig. 3 (b)) renders the rear end alignment wall 70 escape toward the upstream side in the sheet conveyance

direction (Fig. 3(c)) as in a state that the rear end of the sheet bundle S conveyed by the bundle delivering means is in contact with a top end of the rear end alignment wall 70 (Fig. 3(b)). Where the rear end alignment wall 70 is thus escaped, the rear end alignment wall 70 is inclined as shown in Fig. 4(a), and the rear end of the sheet bundle S contacts to the inclined surface of the rear end alignment wall 70. While the rear end alignment wall 70 escaped as shown in Fig. 4(a) is returned to the home position (alignment reference position) as shown in Fig. 2 around the rocking rotation shaft 73 as a center, the rear end of the sheet bundle S is pressed by the rear end alignment wall 70, and the sheet bundles S are stacked on the stacking tray 4 (Fig. 4(c)) as the rear ends of the sheet bundles S are aligned (Fig. 4(b)).

[0031]

As described above, while the escaped rear end alignment wall 70 is returned to the home position, acceleration α of the sheet bundle (or sheet) from pressing of the rear end alignment wall 70 is required to be controlled. This is because the sheet bundle (or sheet) S may be kicked if the acceleration α is high, thereby reducing the alignment capability on the stacking tray 4. Conversely, if acceleration α is low, the productivity of the sheet processing apparatus is reduced. To prevent such problems from occurring, the acceleration α of the sheet bundles S due to pressing of the rear end alignment wall 70, or namely, the acceleration α of the rear end alignment wall 70, is required to be controlled.

[0032]

In this embodiment, where acceleration of the sheet bundle S by pressing of the rear end alignment wall 70 at a time that the rear end alignment wall 70 presses the rear ends of sheet bundle (or sheet) S to align the rear ends, is denoted as α , where gravity acceleration is denoted as g , where kinematical frictional coefficient of the stacking tray 4 is denoted as μ_1' , and where kinematical frictional coefficient between the sheet bundle (or sheet) S pressed by the rear end alignment wall 70 and the sheet bundle (or sheet) S already stacked on the stacking tray 4 is denoted as μ_2' , the operation of the rear end alignment wall 70 is controlled, as shown in Fig. 6 by the finisher CPU 79 so that acceleration α of the sheet bundle (or sheet) S by pressing of the rear end alignment wall 70 satisfies a relation: $\alpha \leq -\mu_1'g$ and $\alpha \leq -\mu_2'g$

[0033]

Thus, the operation of the rear end alignment wall 70 is controlled so that the acceleration α of sheet bundle (or sheet) S from pressing of the rear end alignment wall 70 satisfies the above conditions, and therefore, this apparatus can prevent the sheets from positionally shifting in the conveyance direction at the front and rear ends of the sheet bundle (or sheet) on the stacking tray 4, thereby allowing the sheet bundle (or sheet) S to be delivered and stacked on the stacking tray 4.

[0034]

It is to be noted that although in this embodiment, the sheet stacking surface 4a of the stacking tray 4 is set to extend

substantially horizontally, the rear end alignment wall 70 effectively operates even where the sheet stacking surface 4a is inclined, and where the sheet stacking surface 4a is extending substantially horizontally, the effects itself increase more. Where the sheet stacking surface 4a is set with an inclined angle of eighteen degrees or less inclined to the lower side toward the rear end alignment wall 70, a smaller size of the apparatus can be realized as avoiding interference between the rear ends of the sheet bundles already stacked on the stacking tray 4 and the subsequent sheet bundles delivered out of the processing tray 40.

[0035]

The stacking tray 4 is structured to be movable up and down by a driving means not shown to keep the height of the top surface of the stacked sheet bundles S at a constant level.

[0036]

As described above, according to this embodiment, the sheets are aligned in the conveyance direction of the sheet bundle (rear end alignment) while delivered and stacked on the stacking tray 4, by conveying the sheets until that the rear end of the sheet bundle (or sheet) reaches the top end of the rear end alignment wall, subsequently by rendering the sheet bundle rear end contact with the rear end alignment wall 70 as escaping the rear end alignment wall 70, and by pressing the rear ends of the sheet bundles with the rear end alignment wall 70. At that time, by controlling the operation of the rear end alignment wall 70 with the finisher CPU 79 so that the

acceleration α of sheet bundle from pressing of the rear end alignment wall 70 satisfies the relation of $\alpha \leq -\mu_1'g$ and $\alpha \leq -\mu_2'g$, the apparatus can prevent sheets from positionally shifting in the conveyance direction at the front or rear ends of the sheet bundles, and can improve the stacking alignment property of the sheet bundle on the stacking tray 4.

[0037]

The sheet alignment property on the stacking tray 4 can be improved even where the stacking tray 4 is placed as substantially horizontally extend, and because the space for inclined portion of the stacking tray 4 can be converted to an up and down moving stroke of the stacking tray 4, the number of the sheets stacked on the stacking tray 4 can be made larger without rendering the apparatus body in a larger size.

[0038]

Moreover, because the inclination of the stacking tray 4 can be made gentle, folding of the sheet due to the self-weight of the sheet bundle subjecting to lower curling or having low rigidity caused by steep inclination of the stacking tray 4, can be prevented.

[0039]

Because the rear ends of the sheet bundles delivered on the basis of the bundles are aligned on an upstream side in the delivery direction with respect to the sheet bundles already stacked, this apparatus can prevent the sheets from positionally shifting in the conveyance direction upon engagement of the staple of the already stacked sheet bundles on which the stapling

processing is made with the rear end of the sheet bundle delivered on the basis of the bundle.

[0040]

[Other embodiments]

With the embodiment described above, the photocopier is exemplified as an image forming apparatus. This invention is not limited to this, and this invention can be for other image forming apparatuses such as printers or facsimile machines or other image forming apparatuses such as combined machines combining those functions. Substantially the same effects can be obtained upon application of this invention to the sheet processing apparatus used in such an image forming apparatus.

[0041]

In the embodiment described above, exemplified is the sheet processing apparatus installed in the image forming apparatus body (space portion), but this invention is not limited to this. For example, the sheet processing apparatus can be arranged at the exterior of the image forming apparatus body and can be formed as detachably attached to the image forming apparatus body or formed unitedly with the image forming apparatus body. Substantially the same effects can be obtained upon application of this invention to such a sheet processing apparatus.

[0042]

In the embodiment described above, the exemplified recording method is an electrophotographic method, but this invention is not limited to this. This invention can use other

recording method such as, e.g., inkjet method or the like.

[0043]

[Effect of the present invention]

For the present invention, by controlling acceleration of the sheet or the sheet bundle pushed by sheet rear end aligning means according to the certain condition, slant of conveyance direction of the sheet at the front end or rear end can be avoided and it can improve stacking accuracy of the sheet bundle on the sheet stacking means.

[Brief Description of the Drawings]

[Fig. 1] a cross section showing the entire structure of an image forming apparatus including a sheet processing apparatus according to an embodiment of the invention;

[Fig. 2] a cross section showing a sheet processing apparatus in the image forming apparatus according to the embodiment of the invention;

[Fig. 3] a cross section showing delivery operation of the sheet bundles in the sheet processing apparatus according to the embodiment of the invention;

[Fig. 4] a cross section showing alignment operation of the rear ends of a sheet bundle in the sheet processing apparatus according to the embodiment of the invention;

[Fig. 5] a block diagram showing a control system of the sheet processing apparatus according to the embodiment of the invention;

[Fig. 6] a cross section showing the entire structure of the image forming apparatus having conventional sheet processing apparatus;

[Fig. 7] a top view showing the conventional sheet processing apparatus.

[Description of numerals]

S ..sheet, sheet bundle

g ..gravitational acceleration

α .. acceleration of rear end alignment wall

μ_1' , μ_2' .. kinematical frictional coefficient

1.. sheet processing apparatus

2.. laser scanner unit

3.. photosensitive drum

4.. stacking tray

4a.. sheet stacking surface

5.. developing device

6.. fixing roller pair

7.. delivery roller pair on the body side of the image forming apparatus body

8.. delivery section

8a.. delivery roller

8b.. delivery roller

10.. stapler unit

11.. transfer belt

12.. spring

30.. image forming apparatus

31,32,33,34.. sheet cassettes

35.. original document reading apparatus
36.. image reading section
37.. separating means
38.. pickup roller
40.. sheet tray
41,42.. alignment plates
50.. rocking roller
51.. support arm
54.. rocking arm
60..returning belt
61.. lower guide
62.. rear end stopper
70.. rear end alignment wall
71.. driven roller
72..cam
73.. rocking rotation shaft
76.. rear end alignment wall drive motor
79.. finisher CPU
80.. delivery motor
81.. delivery motor driver
82.. rocking arm drive motor
83.. delivery motor driver
84.. rocking roller drive motor
85.. delivery motor driver
86.. rear end alignment wall drive motor driver
87.. main CPU

[Name of Document] ABSTRACT

[Summary]

[Object] To avoid slant of conveyance direction of the sheet and to improve stacking accuracy of the sheet bundle on the sheet stacking means.

[Solving Means] A representative configuration of a sheet processing apparatus is The present invention relates to a sheet processing apparatus aligning and stacking a sheet comprising: a stacking means for stacking the sheet or a sheet bundle; a conveying means for conveying the sheet or sheet bundle toward the stacking means; a sheet rear end aligning means for aligning rear end of the sheet or sheet bundle upon pressing toward the stacking means the rear end of the sheet or sheet bundle conveyed by the conveying means; and a controlling means for controlling operation of the sheet rear end aligning means. The controlling means controls the operation of the sheet rear end aligning means so that acceleration α of the sheet or sheet bundle S by pressing of the sheet rear end aligning means satisfies a relation: $\alpha \leq -\mu_1'g$ and $\alpha \leq -\mu_2'g$.

[Drawing selected] Fig.4

Abstract

The present invention relates to a sheet processing apparatus aligning and stacking a sheet comprising: a stacking means for stacking the sheet or a sheet bundle; a conveying means for conveying the sheet or sheet bundle toward the stacking means; a sheet rear end aligning means for aligning rear end of the sheet or sheet bundle upon pressing toward the stacking means the rear end of the sheet or sheet bundle conveyed by the conveying means; and a controlling means for controlling operation of the sheet rear end aligning means. The controlling means controls the operation of the sheet rear end aligning means so that acceleration α of the sheet or sheet bundle S by pressing of the sheet rear end aligning means satisfies a relation: $\alpha \leq -\mu_1'g$ and $\alpha \leq -\mu_2'g$; where acceleration of the sheet or sheet bundle by pressing of the sheet rear end aligning means at a time that the sheet rear end aligning means presses the rear end of the sheet or sheet bundle to align the rear end, is denoted as α , where gravity acceleration is denoted as g , where kinematical frictional coefficient between the sheet or sheet bundle pressed by the sheet rear end aligning means and the stacking means is denoted as μ_1' , and where kinematical frictional coefficient between the sheet or sheet bundle pressed by the sheet rear end aligning means and the sheet or sheet bundle already stacked on the stacking means is denoted as μ_2' .

FIG. 1

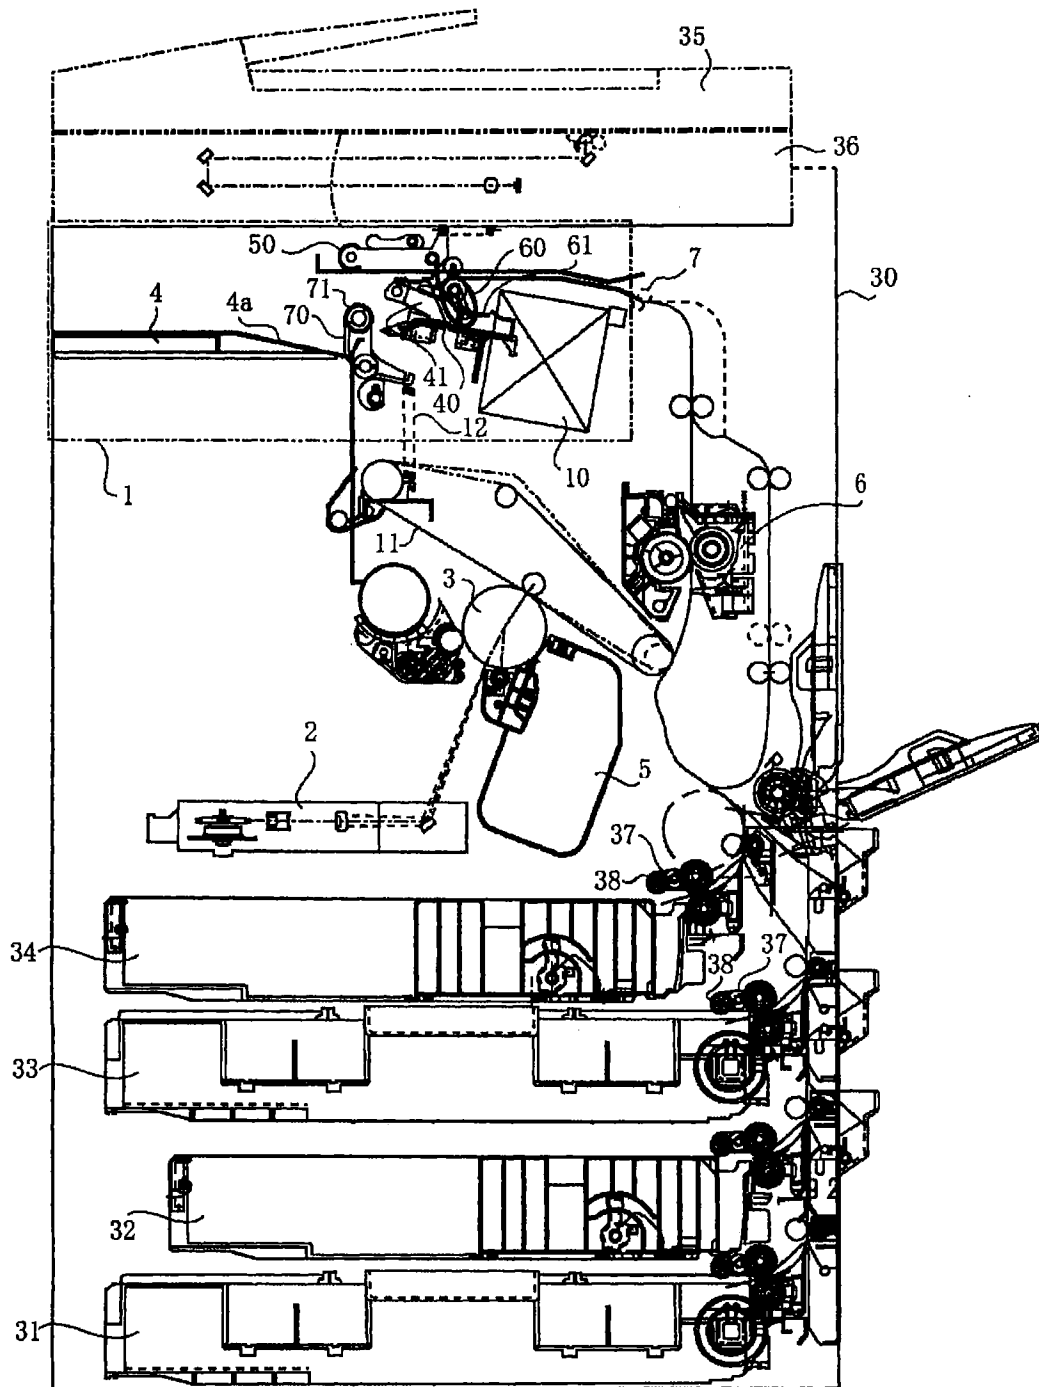


FIG. 2

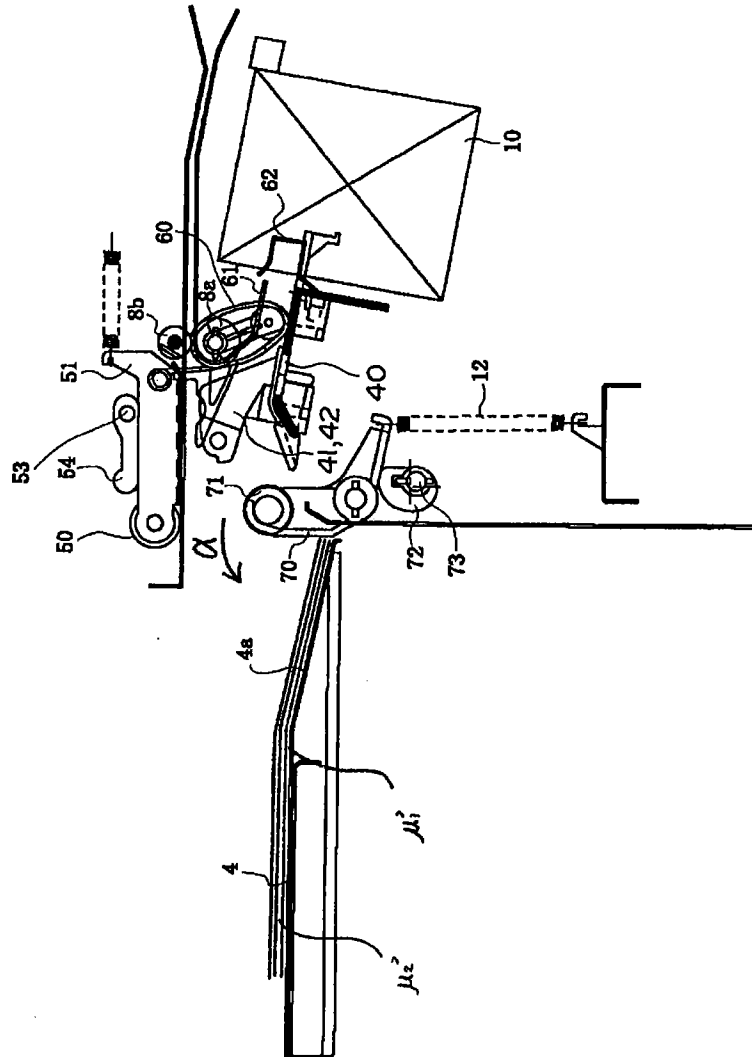


FIG. 3

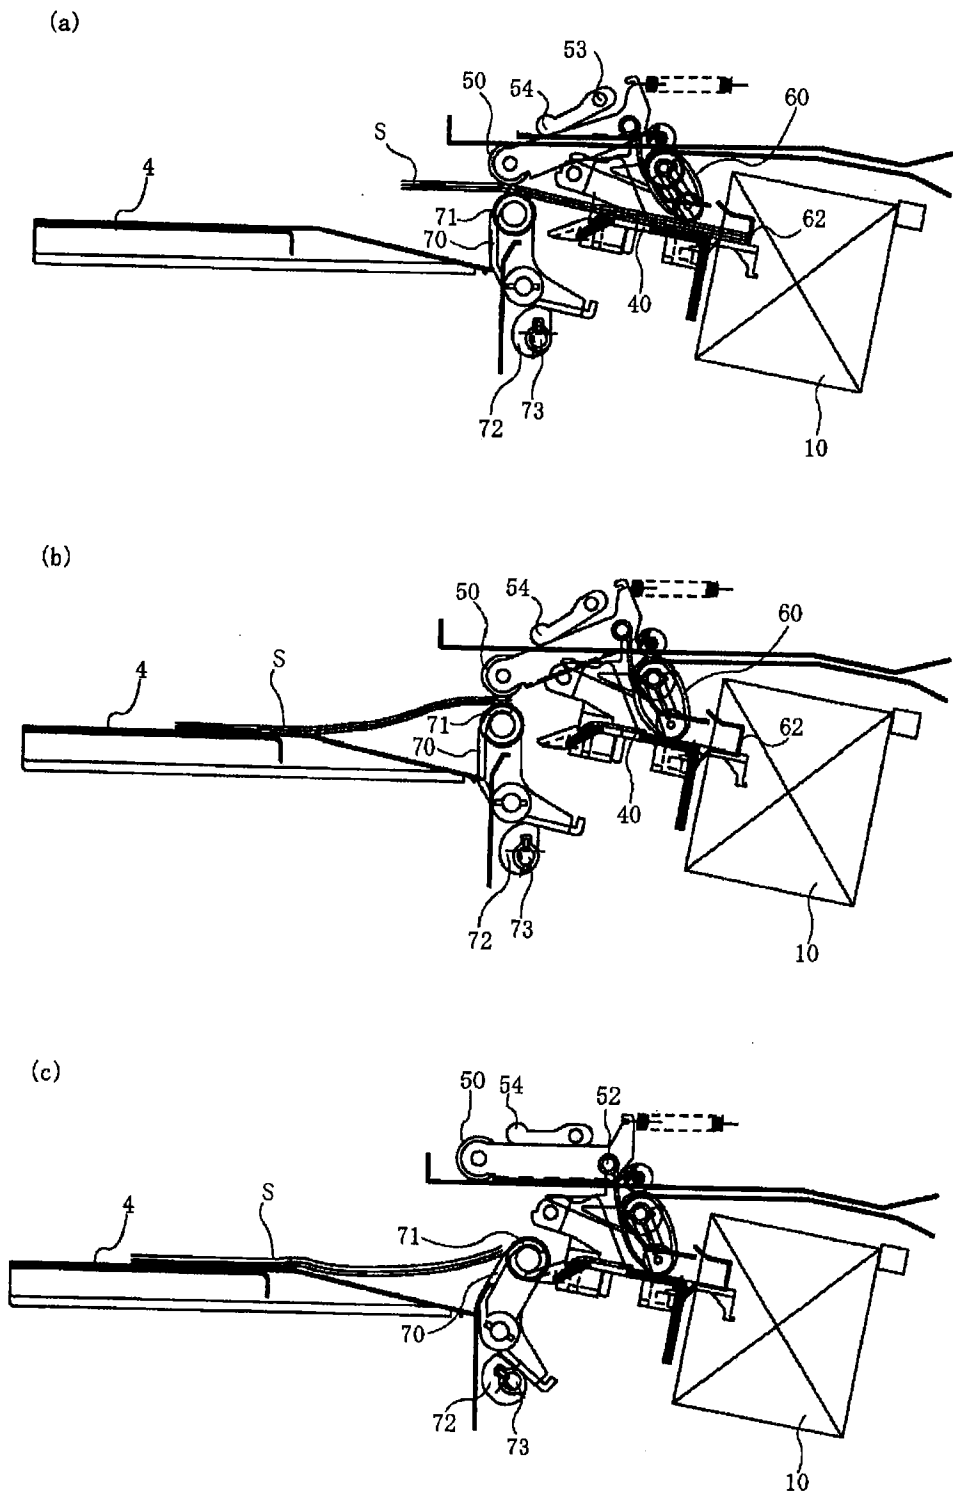


FIG. 4

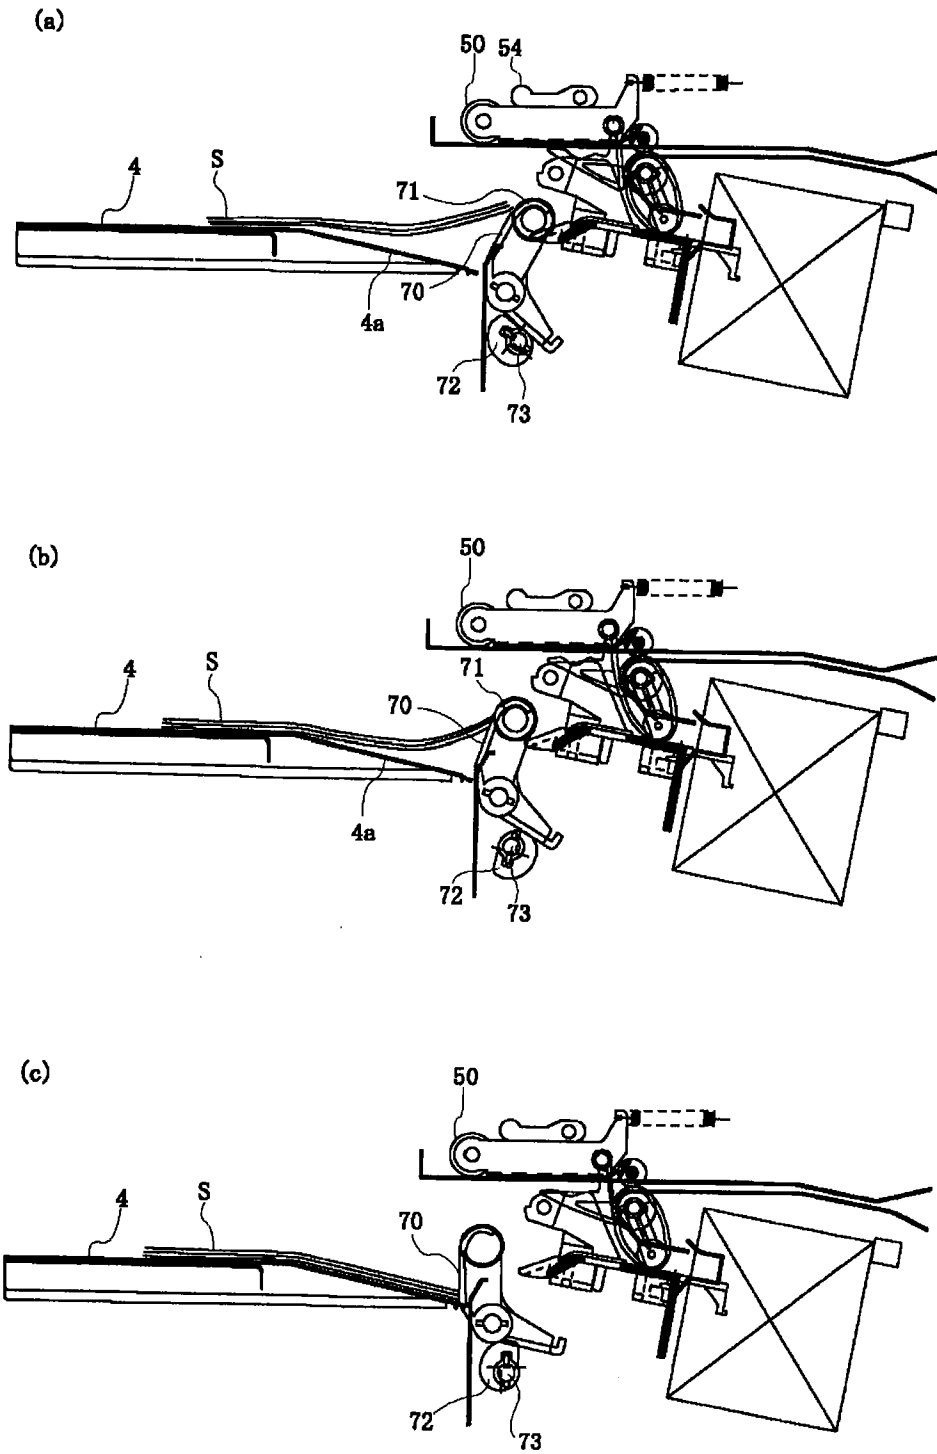


FIG. 5

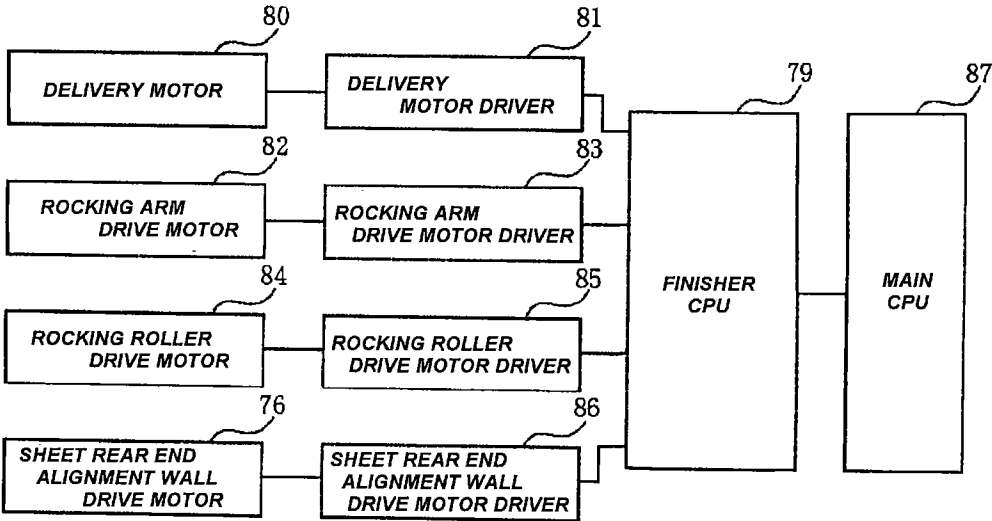


FIG. 6

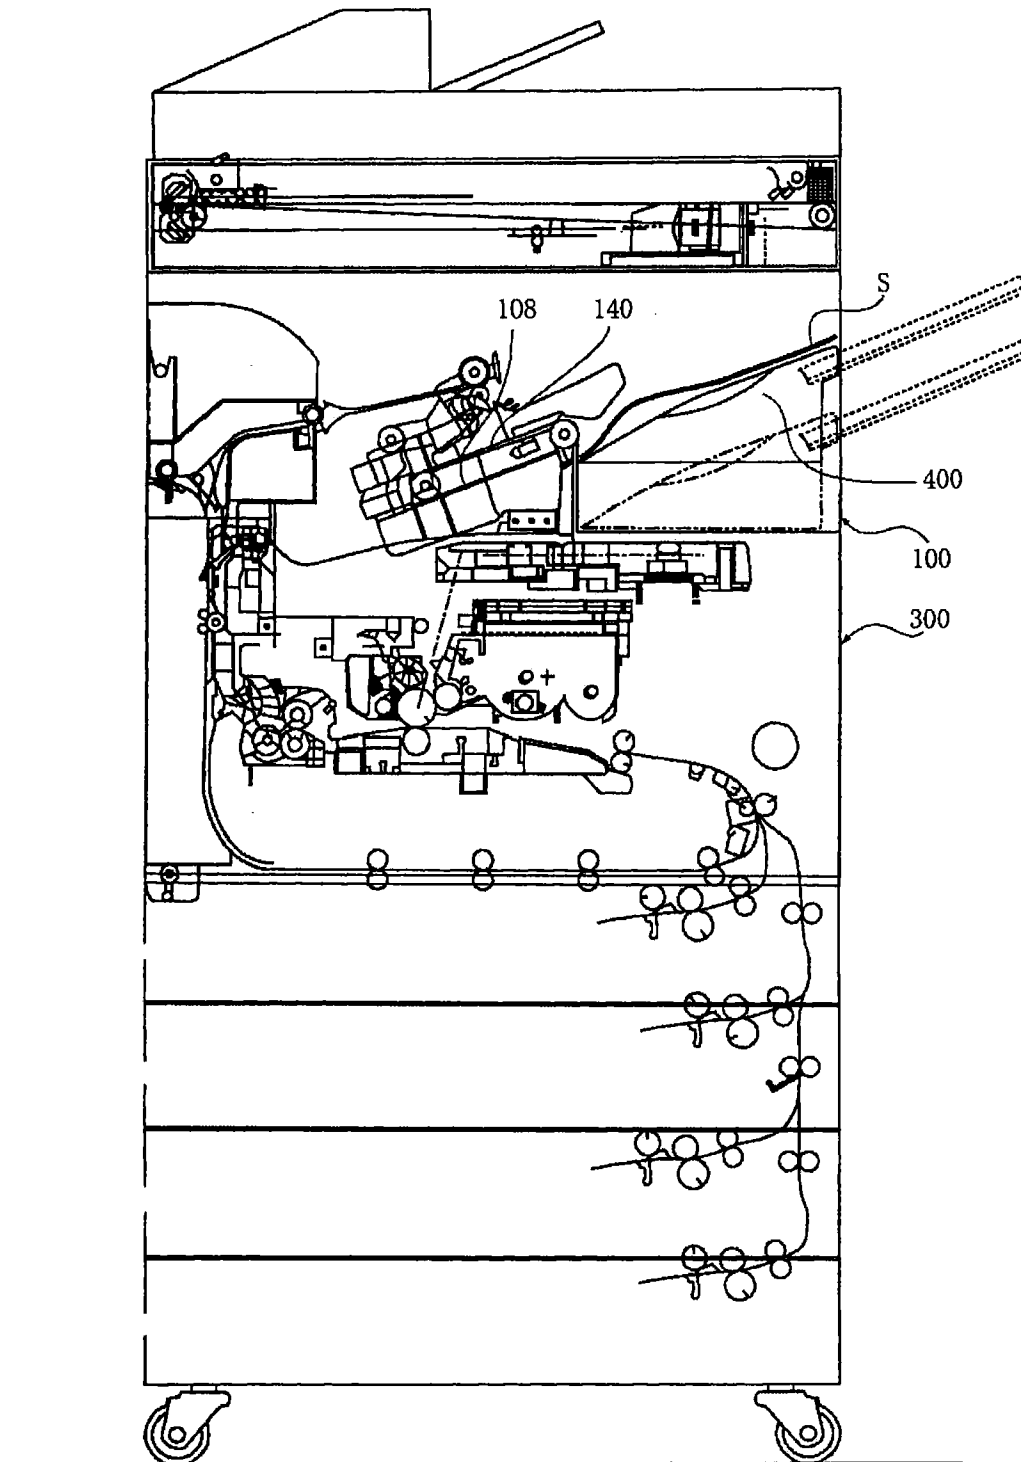


FIG. 7

